

2000W 10,30A
11,30A



380/400/415V 50Hz

HQI T 2000 / D
HQI T 2000 / D / I
HQI TS 2000 / DS
MHN LA 2000
MHN SA 2000

B F A - 2400 series
Weatherproof Control Gear Units
For Metal Halide Lamps
Independent Units

IP 65

class I



tw130



REFERENCE STANDARD

EN 61347-1	Safety
EN 61347-2-9	
EN 60598-1	
EN 60923	Performance
EN 61000-3-2	Harmonic Limits
EN 55015	
EN 61547	Immunity
EN 61000-3-3	Flicker

Case Material:
"ALUMINIUM EXTRUDED"

Cover Material: "Tecnopolimero"
Glow wire test: 850°C 5 sec

Lamps		General Characteristics									
		- Alimentatore a basse perdite colato in resina				tw 130 °C		Low losses Moulded- resin Ballast, -			
		- Condensatore di rifasamento				HPF		High Power Factor Capacitor -			
		- Accenditore Elettronico:				(vedi / look drawing)		Electronic Ignitor : -			
W	A	Mains value			ta °C	Control Gear Range		Appr.	Losses W*	weight Kg	Note.
		V (50Hz)	A	cosφ		Type	Cod.				
2000	10,3	380 - 400	6,2	0,90	45	BFA 2400.34	322434000		103	16	
		400 - 415	6,2	0,90	45	BFA 2400.44	322444000		103	16	

*Valori misurati a 25°C


Disponibili a 380-400V 60Hz

Available in 380-400V 60Hz

*Value measured at 25°C

Dimensioni


Dimensions

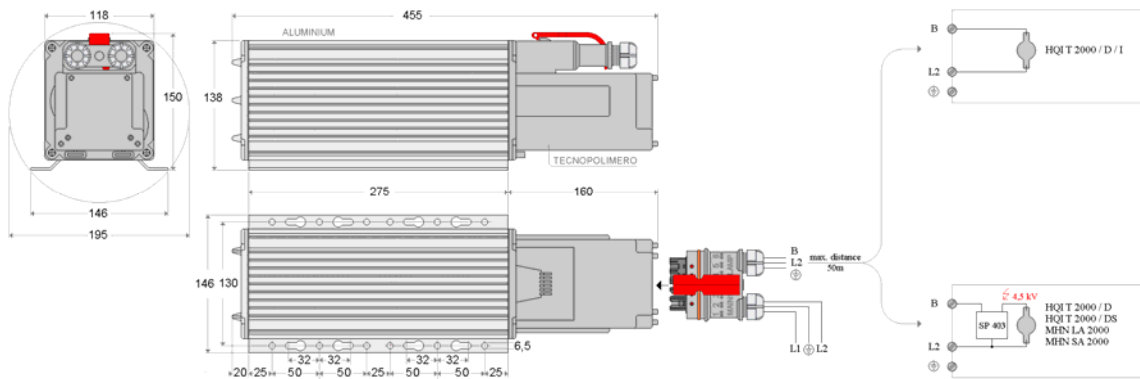

FAST CONNECTION (PATENTED)

Posizioni di installazione

Installation position



Pressacavi per cavi: φ mm 10...14 type H07 RN-F Cable gland for cable:
o similari - or similar
Connettore ad innesto rapido 2,5mm² Screwless terminals